

# Installation Instructions JK Front Grab Handles

Product Number: JK1050 Application: 07-15 JK WRANGLER

# SAFETY

#### Your safety and the safety of others is very important.

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

Read and understand all safety precautions and instructions before installing this product.

#### THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR INSTALLATION AND USE RESTS WITH THE OWNER.

### CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY OR EQUIPMENT DAMAGE.

# SENSORS FIELD OF VIEW WILL BE ALTERED WITH USE OF THE REPLACEMENT BUMPER.

**Injury hazard** 

### Failure to observe these instructions could lead to severe injury or death.

Always remove jewelry and wear eye protection.

- □ Always use extreme caution when jacking up a vehicle for work. Set emergency brake and use tire blocks. Locate and use the vehicle manufacturers designated lifting points. Use jack stands.
- Always use appropriate and adequate care in lifting components into place.
- Always insure components will remain secure during installation and operation.
- Always wear safety glasses when installing this kit. A drilling operation will cause flying metal chips. Flying chips can cause serious eye injury.
- □ Always use extreme caution when drilling on a vehicle. Thoroughly inspect the area to be drilled (on both sides of material) prior to drilling, and relocate any objects that may be damaged.
- Always use extreme caution when cutting and trimming during fitting.
- **Always** tighten all nuts and bolts securely per installation instructions.
- Always route electrical cables carefully. Avoid moving parts, components that become hot and rough or sharp edges.
- **Always** insulate and protect all exposed wiring and electrical terminals.
- Always perform regular inspections and maintenance on mounts and related hardware.



## Installation Instructions JK Front Grab Handles Product Number: JK1050 Application: 07-15 JK WRANGLER

# I. <u>Overview</u>

Congratulations on your purchase of the industries' best and most stylish JK Front Grab Handles!

Your Grab Handles were designed in 3-D, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of the quality Front Grab Handles from Fab Fours Inc!






# Installation Instructions JK Front Grab Handles

Product Number: JK1050 Application: 07-15 JK WRANGLER

# **Vehicle Preparation**

1. Start by removing the two OEM bolts shown below.

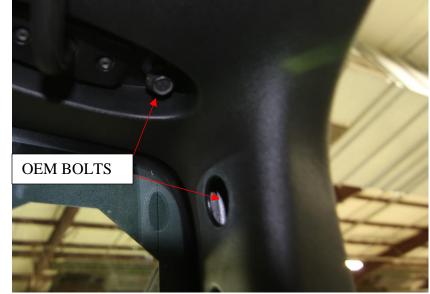

2. Next install the logo plate using supplied button head bolt, washers, lock washer, and nut. See image below (Red backing was added to better show logo plate installation.)





## Installation Instructions JK Front Grab Handles Product Number: JK1050

Product Number: JK1050 Application: 07-15 JK WRANGLER

**3.** Next put bolt through the other side of logo plate, and stacking spacers on the back side of grab handle. See image below.



**4.** Next holding the spacers in place so they do not fall off bolt, install bolt into the removed OEM bolt location located in the A pillar. Do not tighten. See image below.





## Installation Instructions JK Front Grab Handles Product Number: JK1050

Product Number: JK1050 Application: 07-15 JK WRANGLER

5. Next stacking two spacers on top of upper mount install supplied bolt in to upper mounting location as shown below. Do not fully tighten.



- 6. Next starting with upper mount tighten all hardware.
- 7. Repeat steps 1-6 to install passenger side grab handle.



## Installation Instructions JK Front Grab Handles Product Number: JK1050

Product Number: JK1050 Application: 07-15 JK WRANGLER


# II. Maintenance/Care

- □ Periodically check and tighten all fasteners.
- □ Stripped, fractured, or bent bolts or nuts need to be replaced.
- □ Keep all surfaces free of dirt, road grime, and standing water to ensure finish longevity.

# III. Contact Information

Fab Fours Inc. 2213 Industrial Park Rd. Lancaster, SC 29720

Phone	(866)-385-1905
Fax	(866)-574-1424
Email	Support@fabfours.com

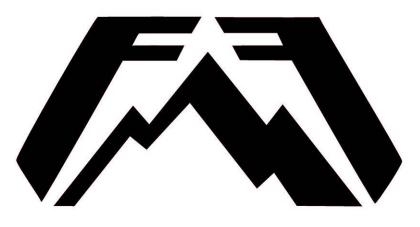

More than expected... Better than expected